







GE Start Bright Stik<sup>TM</sup> LED16/STIK/830/100-240/E27/F 2/10

93023114

# **Product information**

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb - and some sockets where a traditional bulb or CFL doesn't fit . Replace a 40W, 60W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years\*. That's a long time you can spend not worrying about light bulbs.





### **Product data**

Cap/Base	E27
Bulb Finish	White
Bulb Diameter [mm]	45
Nominal Length [mm]	136
Net weight per piece [g]	93
Brand	GE BX

### Performance data

Colour Rendering Index (CRI) [Ra]	80
Nominal correlated colour temperature (CCT) [K]	3000
Nominal beam angle [°]	240
Nominal lumens [lm]	1521
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000

### **Electrical data**

Nominal power [W]	16
Nominal lamp power factor	0.7
Number of switching cycles	50000


## Logistic data

DUN Code	10064894531351
EAN Code	64894531354
Pack Quantity	10



93023114

#### **Photometric Data**

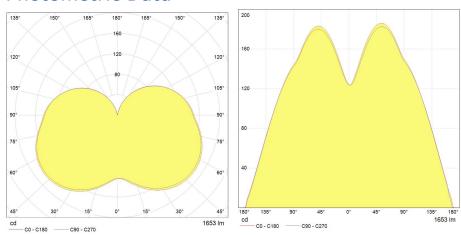

#### **Downloads & Links**

Go to the catalog site (HTTP)

Product datasheet (PDF)

Photometry (IES)

High-resolution image (JPG)

**BrightStik range Datasheets (HTTP)** 

**BrightStik range images (HTTP)** 

**Lighting design tools & calculators (HTTP)** 

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)